



LADY

ROAD BARRIERS

integrated control box
for passages up to 4 m

**FOUNDATION PLATE
AND RECEIVER
NOT INCLUDED**



CONTROL PANELS:

LADY → DA.24V p.143

24 Vdc intensive use

- Electromechanical 24 Vdc right barrier for intensive use. The barrier can be easily converted to left operation
- Manual release with external activation
- Optional built-in FTC.S photocells thanks to the innovative hide-away system that allows for their perfect integration
- 2 adjustable mechanical stops
- Optional battery powered operation
- Amperometric sensor obstacle detection system to prevent crushing
- Three adjustable limit switches for the braking phases and the closure position
- Stainless steel version LADY.L available
- Simple, quick and reliable rod balancing system
- Foundation plate accessory with VE.PS coach screws



LADY.A
9081001
4.2 m aluminium arm with caps included (4200x60x38mm). Available in two pieces needs the joint (LADY.GT).



LADY.P
9081002
4.2 m white painted aluminium arm. Caps are included. Provided with red rubber profiles.




LADY.GT
9424001
Aluminium joint for LADY.A.




VE.PS
9623068
Foundation plate with coach screws for LADY.



VE.TERM
9864010
Thermostat for very cold places.



VE.AM
9078020
Mobile support for bars.



VE.RAST
9672010
Aluminium rack L= 2 m. H= 60 cm



VE.AF
9078010
VE.AFI
9078015
Painted/ Stainless steel fixed support for bars.



LADY.COL
9230001
Support for the installation of a second pair of photocell.



LADY.SN
9780001
Articulated joint set for LADY.A / LADY.P (rubber profiles must be removed). It compromises the use of any other accessory.



LADY.L
9534001
Flashing light set for LADY.P.



VE.KM1HN
9614267
VE.KM2HN
9614268
Single/two-channel loop detector.



VE.CS
9760050
Traffic light control unit for LED.TL.




LED.TL
9766003
2 light 230 Vac LED traffic light.




VE.CAT500
9549020
Set of 20 adhesive refractor strips for LADY.A / LADY.P.





ESA BASIC
9176108
System that reduces the electrical energy consumption. In the LADY model, the use of ESA BASIC is not compatible with the battery operation.




KSUN
9611004
KIT for system operation via solar panel. For 24 Vdc models.



MADE IN ITALY

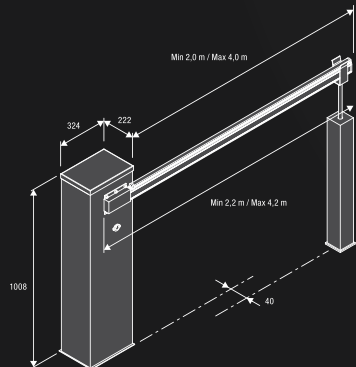

VE.PS



ACCESSORIES FOR USE	BAR LENGTH (m)				
	2.2	2.7	3.2	3.7	4.2
No accessories	C	C	C	B	A
LADY.P (only upper)	C	C	B	B	A
LADY.P (upper and lower)	C	C	B	B	A
VE.RAST	C	B	B	A	---
LADY.P (only upper) + VE.RAST	C	B	B	A	---
LADY.P (only upper) + VE.AM	C	B	B	A	A
LADY.P (upper and lower) + VE.AM	C	B	B	A	---
LADY.P (only upper) + VE.RAST + VE.AM	C	B	A	---	---
SC.RES	C	B	A	A	---
LADY.P (only upper) + SC.RES	C	B	A	A	---
SC.RES + VE.AM	C	B	A	A	---
LADY.P (only upper) + SC.RES + VE.AM	C	B	A	---	---

The installation of the VE.RAST interferes with the use of the SC.RES and vice versa.
The installation of the LADY.L lights kit does not influence the balancing of the bar.

TECHNICAL DATA	LADY
Code	9083098
Power supply	230 Vac (50-60Hz)
Motor supply	24 Vdc
Max absorbed current	1.6 A
Torque	205 Nm
Opening time	3" - 5"
Operation cycle	intensive use
Protection level	IP44
Operating temperature	-20°C / +50°C
Weight	52 kg
Items no. per pallet	9